## Montana Tech Library

## Digital Commons @ Montana Tech

Silver Bow Creek/Butte Area Superfund Site

Montana Superfund

Summer 8-28-2024

Silver Bow Creek Conservation Area Repository Data Gap Quality Assurance Project Plan Request for Change to Install Additional Test Pits and Perform Material Characterization

Josh Bryson

Follow this and additional works at: https://digitalcommons.mtech.edu/superfund\_silverbowbutte

Part of the Environmental Health and Protection Commons, Environmental Indicators and Impact Assessment Commons, and the Environmental Monitoring Commons

# **Atlantic Richfield Company**

### **Josh Bryson**

Liability Manager

317 Anaconda Road Butte MT 59701 Direct (406) 782-9964 Fax (406) 782-9980

August 28, 2024

Emma Rott Remedial Project Manager US EPA – Montana Office 10 W. 15th Street, Suite 3200 Helena, MT 59626

Daryl Reed DEQ Project Officer P.O. Box 200901 Helena, Montana 59620-0901 Erin Agee, Senior Assistant Regional Counsel Office of Regional Counsel – CERCLA 1595 Wynkoop Street Denver, CO 80202 Mail Code: 8ORC-C

Jonathan Morgan, Esq. DEQ, Legal Counsel P.O. Box 200901 Helena, Montana 59620-0901

RE: Silver Bow Creek Conservation Area Repository Data Gap Quality Assurance Project Plan Request for Change to Install Additional Test Pits and Perform Material Characterization

Agency Representatives:

I am writing to you on behalf of Atlantic Richfield Company to submit the Request for Change (RFC) to the Silver Bow Creek Conservation Area (SBCCA) Repository Data Gap Quality Assurance Project Plan (QAPP) (RFC-SBCCA Data Gap QAPP-2024-1). This RFC provides the procedures and protocols necessary to install additional test pits and perform additional material characterization to further classify the physical characteristics of the materials to be excavated at the Butte Reduction Works, Buffalo Gulch, Diggings East, and Northside Tailings sites.

The RFC may be downloaded at the following link: RFC-Data Gap QAPP-2024-01.

If you have any questions or comments, please call me at (406) 723-1834.

Sincerely,

Josh Bryson, PE, PMP Liability Manager

Remediation Management Services Company

An affiliate of Atlantic Richfield Company

## **Atlantic Richfield Company**

317 Anaconda Road Butte MT 59701 Direct (406) 782-9964 Fax (406) 782-9980

#### cc (email only):

Chris Greco / Atlantic Richfield
Mike Mc Anulty / Atlantic Richfield
Tim Hilmo / Atlantic Richfield
Loren Burmeister / Atlantic Richfield

Dave Griffis / Atlantic Richfield
Jean Martin / Atlantic Richfield
Irene Montero / Atlantic Richfield

David A. Gratson / Environmental Standards

Mave Gasaway / DGS Adam Cohen / DGS Lucas Satterlee / DGS

Brianne McClafferty / Holland & Hart

Carolina Balliew / EPA
Molly Roby / EPA
David Shanight / CDM
Curt Coover / CDM
James Freeman / DOJ
Amy Steinmetz / DEQ
Logan Dudding / DEQ
Katie Garcin-Forba / DEQ
Doug Martin / NRDP
Jim Ford / NRDP

Pat Cunneen / NRDP

Katherine Hausrath / NRDP Ted Duaime / MBMG

Gary Icopini / MBMG Becky Summerville / MR

John DeJong / UP Robert Bylsma / UP

John Gilmour / Kelley Drye

Leo Berry / BNSF Robert Lowry / BNSF Brooke Kuhl / BNSF

Lauren Knickrehm / BNSF Doug Brannan / Kennedy Jenks

Matthew Mavrinac / RARUS Harrison Roughton / RARUS

Brad Gordon / RARUS Mark Neary / BSB Eric Hassler / BSB Brandon Warner / BSB

Abigail Peltomaa / BSB
Aaron Rains / BSB
Sean Peterson/BSB
Josh Vincent / WET
Kevin Bethke / W&C
Scott Bradshaw / W&C
Emily Evans / W&C
Paddy Stoy / W&C
Joe McElroy / Pioneer

Troy Colvin / Pioneer
Mark Meyer / Pioneer
Pat Sampson / Pioneer
Karen Helfrich / Pioneer
Brad Hollamon / Pioneer
Randa Colling / Pioneer
Rich Keeland / Aspect
Andy White / Aspect
lan Magruder/ CTEC

CTEC of Butte

Scott Juskiewicz / Montana Tech

File: RMO – upload

BPSOU SharePoint - upload

# ATLANTIC RICHFIELD COMPANY

# **RFC - REQUEST FOR CHANGE**

Infrastructure Inc. and Pioneer Technical Services, Inc.	NA
ATTENTION OF: Emma Rott/Daryl Reed	
	Technical Services, Inc.  ATTENTION OF:

SUBJECT: Additional Test Pit Soils Investigation and Material Characterization to Support a Soil-Water Slurry System Design

O ELECTRICAL O MECHANICAL ⊗ CIVIL OSTRUCTURAL/ARCHITECTURAL

O INSTRUMENTATION O ENVIRONMENTAL

OPERABLE UNIT: Butte Priority Soils Operable Unit REFERENCE DWG., P.O., TAG, SPECIFICATION NO. (FOR DEVIATIONS OR DEFICIENCIES) ETC.: SBCCA Repository Data Gap Quality Assurance Project Plan (QAPP).

MAJOR WORK TASKS: Install Additional Test Pits for Material Characterization

#### PROBLEM DESCRIPTION:

This request for change (RFC) outlines additional site investigation procedures that will be incorporated into the Silver Bow Creek Conservation Area Repository Data Gap Quality Assurance Project Plan (QAPP) (SBCCA Repository Data Gap QAPP; Atlantic Richfield Company, 2024). This RFC provides the procedures and protocols necessary for Atlantic Richfield Company (Atlantic Richfield) to install additional test pits and perform additional material characterization to further classify the physical characteristics of the materials to be excavated at the Butte Reduction Works (BRW), Buffalo Gulch (BG), Diggings East (DE), and Northside Tailings (NST) Sites. The results of the material characterization will provide additional physical properties to support the design of a soil-water slurry system to transport waste to the Berkely Pit as part of the remedial actions (RAs) necessary for the Butte Priority Soils Operable Unit Consent Decree.

As described in SBCCA Repository Data Gap QAPP Section 1.1, additional site investigations were anticipated to support development of the Remedial Design Work Plan(s). An RFC to the SBCCA Repository Data Gap QAPP was identified as one of the anticipated methods for proposing these additional site investigations.

#### **Objective of the Additional Test Pits**

Additional material characterization is needed to define physical properties of materials that could be disposed of in the Berkeley Pit utilizing a soil-water slurry pumping system. Previous investigations have generally focused on the environmental characterization of the site material, and provided limited data related to soil particle size distribution, particularly regarding characterizing larger particle size materials. Characterization of larger particle size materials is necessary to support the design and evaluation of the soilwater slurry system. The additional test pits will provide necessary additional information on the particle distribution of full material bulk sample, including oversized materials.

### **Slurry Design Test Pit Locations**

Atlantic Richfield plans to excavate a total of 13 test pits, with 2 to 5 test pits installed at each RA site (BRW, BG, DE, and NST). Material collected from test pits at each site will be composited into one representative bulk sample (approximately 10-cubic yards) for each RA site for material characterization testing and analysis (Table 5). The additional test pit locations are shown on revised Figures 2, 3, and 4. The locations shown on Figures 2, 3, and 4 are approximate, and the number of and pit locations may be modified as determined by the Field Team Leader in consultation with the Contractor Project Manager and Contractor Quality Assurance Officer. The test pits will be excavated to the depth of the proposed RA excavation (Table 6). The total depth of each test pit may vary depending on field conditions encountered and/or equipment limitations. Most specifically, test pits may be stopped in any scenario that may result in risk to the field team staff, equipment operators, or others associated with performance of the work.

#### **General Procedures**

The test pits will be excavated following the general procedures described in the SBCCA Repository Data Gap QAPP, SOP-S-06 (Appendix A), and as described below. Material collected from the test pits at each RA site will be composited into one representative bulk sample (approximately 10-cubic yards) for further material characterization testing and analysis as described in the following sections.

#### Test Pits and Bulk Sample Collection and Testing

- Test pit locations will be marked and surveyed.
- Test pits will be excavated using a track-mounted or rubber-tired excavator. The type of excavation equipment used for each test pit will be documented.
- Two to five test pits will be excavated at each RA site as shown on revised Figures 2, 3, and 4.
- Each test pit will be excavated to the depth identified in Table 6. All excavated material will be placed at least 3 feet from the excavated test pit's edge.
- Once the total depth is achieved, approximately 5 cubic yards of material will be scraped from the wall to characterize the entire test pit profile and stockpiled. The stockpiled material will then be homogenized and approximately 3 to 4 cubic yards of a representative sample will be loaded into a dump truck.
- Once material has been collected from all test pits and loaded into the dump truck, for an approximate bulk sample size of 10 cubic yards, a tare and gross weight will be measured on the dump truck and the sample will be unloaded at Pioneer's geotechnical laboratory for material testing.
- A representative moisture content sample will be collected from the bulk RA location sample. The moisture content sample will be used to account for water weight in the bulk sample.
- The greater than 3-inch material will be screened from the bulk RA location sample using a skid steer and skeletal bucket attachment. The greater than 3-inch material will be reloaded into a dump truck to collect a gross weight. The net weight of the greater than 3-inch material will be used to adjust the laboratory gradation to characterize the entire bulk sample.
- A representative sample will be collected from the greater than 3-inch material for abrasion and specific gravity testing.
- A representative sample will be collected from the remaining less than 3-inch material for laboratory gradation, abrasion, specific gravity, slurry consolidation, and column settling testing as described in Table 5.
- An abrasion test will be conducted on the slag material, if recovered from the BRW test pits.
- The laboratory gradation curve will be adjusted based on the weight of the greater than 3-inch material to generate a gradation curve for the total, bulk sample. The total gradation curve will be used to identify the D50 and D85 at each RA site.

#### Test Pit Logging

- Test pit logs will be completed at each location.
- Test pit logging will be completed as described in the Repository Data Gap QAPP.

#### Test Pit Material Disposal

- Test pits will be backfilled with excavated materials not sampled and supplemented with backfill material as necessary.
- Disturbed areas will be seeded with an upland seed mix.
- Materials from the bulk RA location sample will be disposed of in the Butte Mine Waste Repository.
- There is a chance that hazardous wastes could be encountered during test pit excavation. Any hazardous wastes
  encountered during test pit excavation will be handled as detailed in the SBCCA Repository Data Gap QAPP.

#### **Equipment**

- Field logbook and pens.
- Field forms and references (Appendix C).
- Measuring tape.
- Unified Soil Classification System chart (American Society for Testing and Materials International [ASTM] D-2488) (Appendix C).
- Munsell color chart.
- Chain of custody forms.
- Decontamination equipment (pressure washer, tap water, dilute nitric acid, Liquinox soap, decontamination containers, paper towels, scrub brushes, and spray bottles). Refer to SOP-DE-02 in Appendix A.
- Digital camera.
- Survey-grade Global Positioning System unit.
- Appropriate safety Personal Protective Equipment.

#### **Sampling and Analysis Procedures**

Additional sampling and analysis procedures have been added in Table 5 and include the following.

- Moisture Content: ASTM D2216
- Gradation Testing: ASTM C117 and ASTM C136.
- Abrasion Testing: ASTM C131
- Specific Gravity: ASTM C127 and ASTM C128

Column Settling Test Slurry Consolidation Test **Project Team** WSP, Jordan Contracting, Inc. (JCI), Pioneer's geotechnical laboratory(s) and personnel, and WSP's Lakewood, Colorado geotechnical laboratory will complete the described excavation and material testing. **Proposed Schedule** The test pits will be installed as soon as practical upon approval from Agencies. **Revised Figures (Attached)** Figure 2 BG Site Map Figure 3 BRW Site Map Figure 4 DE/NST Site Map **Revised Tables (Attached)** Table 5: Sample Collection, Preservation, and Holding Times Table 6: BPSOU Site Investigation Locations References Atlantic Richfield Company, 2024. Silver Bow Creek Conservation Area Repository Data Gap Quality Assurance Project Plan (QAPP). Prepared by Pioneer Technical Services, Inc. May 2024. ODesign Deficiency O Material Substitution O Engineering Change O Vendor Material Deficiency Request ⊗ Scope O Agency Directive ⊗ Additional Data Collection O Construction Deficiency O Clarification/Information O Schedule O Other RESPONSE/DIRECTIVE 1. Approve the excavation of test pits and collection of additional material characterization data. on behalf of Alan Erickson Project Manager

Atlantic Richfield Co. Representative

EPA Representative \_\_\_\_


DEQ Representative

CC: See Cover Letter

Date


\_Date \_


Date

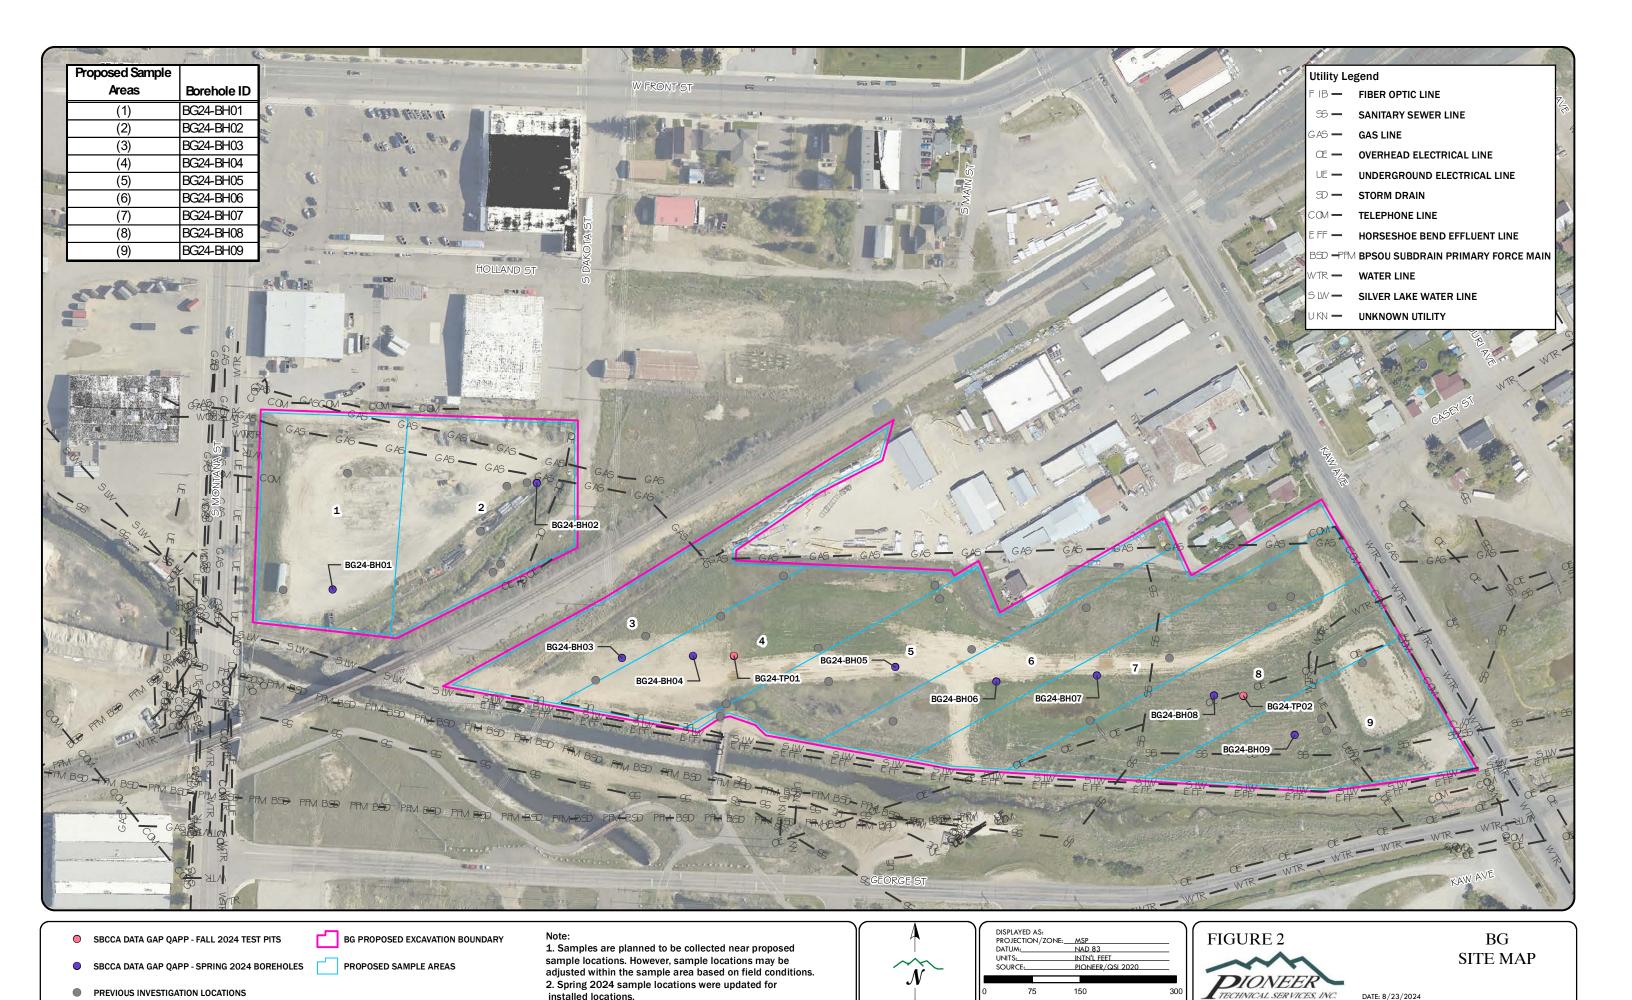

DATE: 8/23/2024



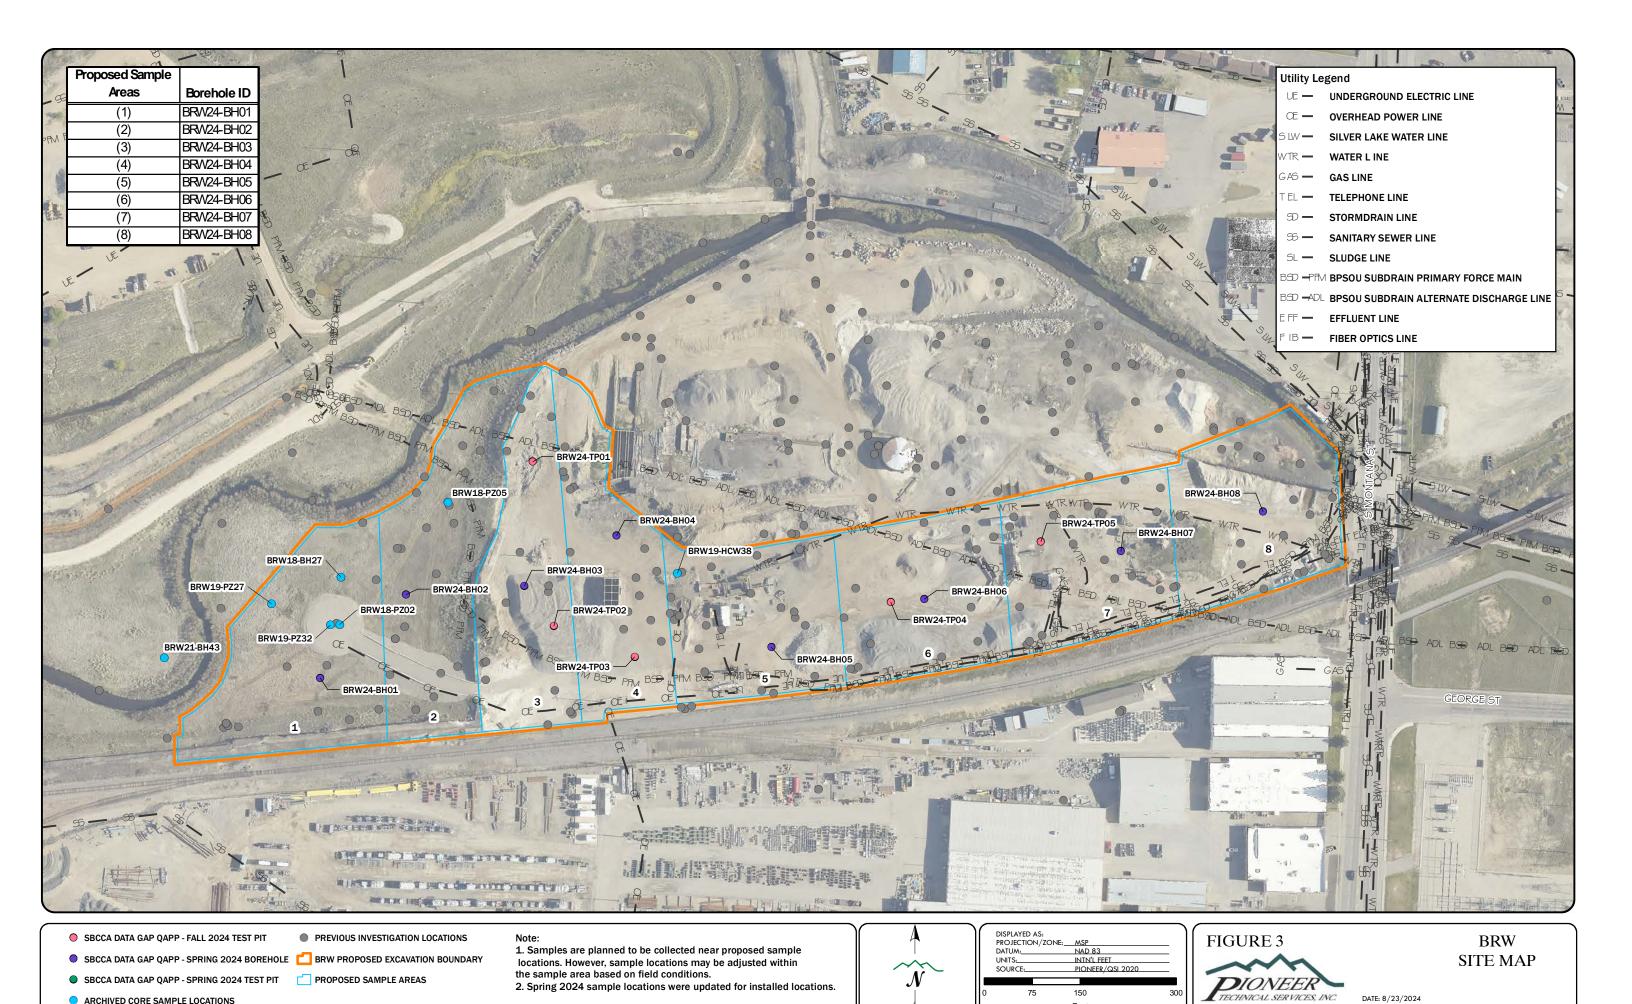

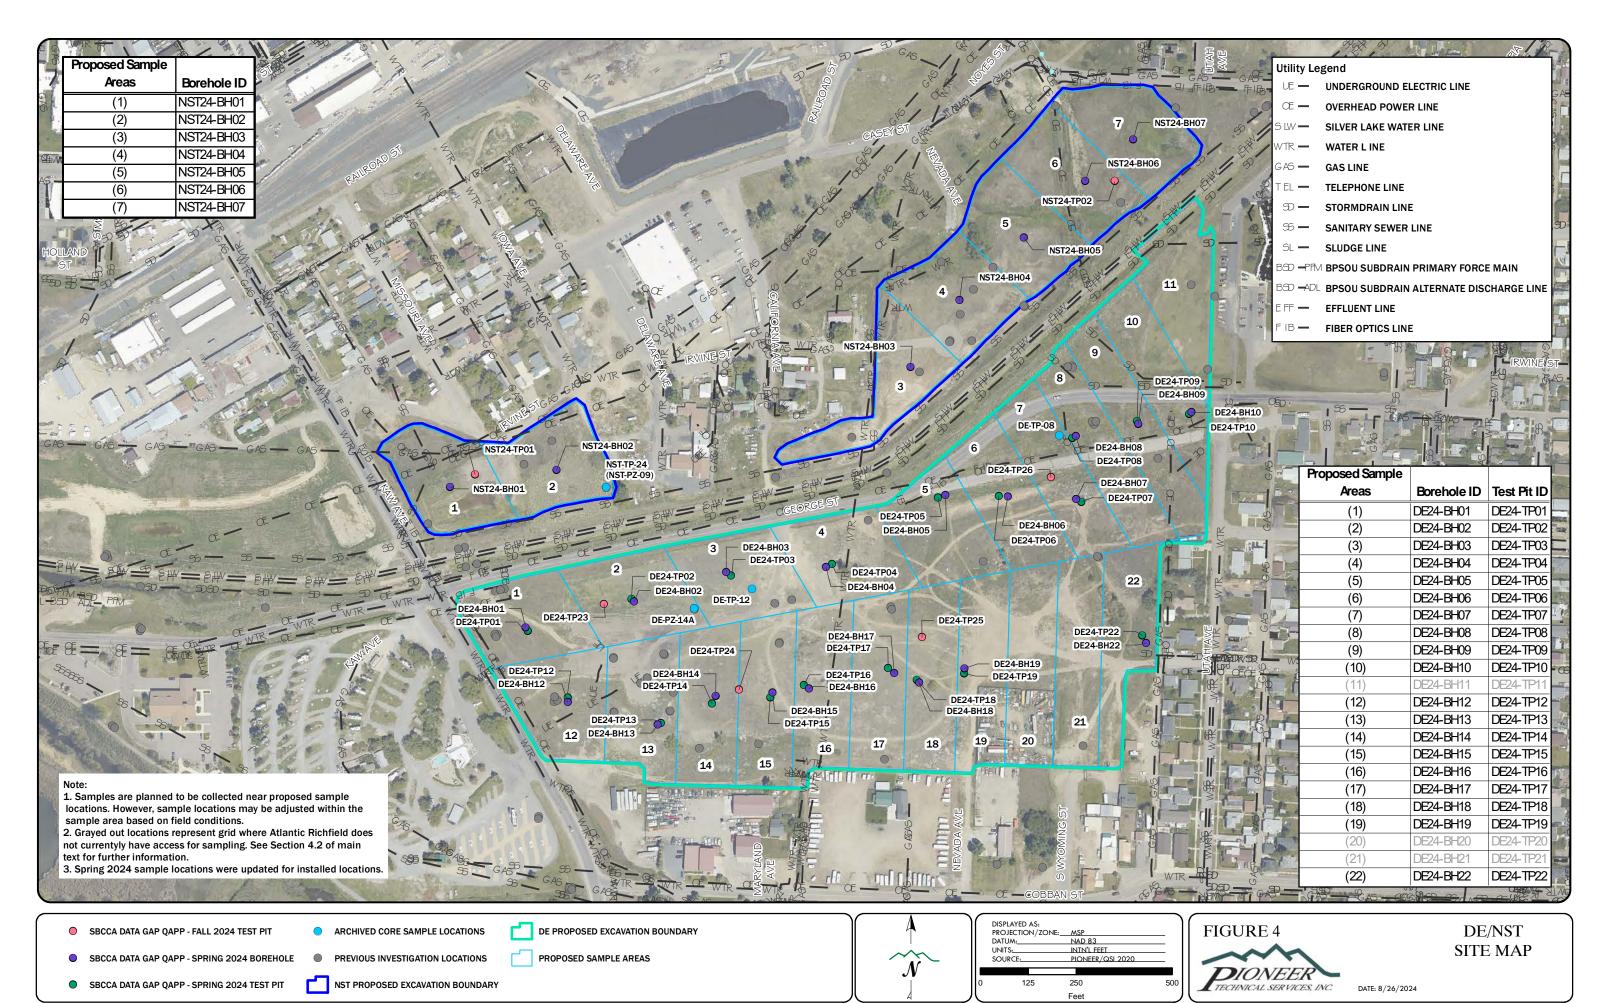

Analytical Group	Analytical Lab/Company <sup>1</sup>	Analyte	Analytical Method	Lab Reporting Limit (CRQL for Data Validation Purposes)	Lab Method Detection Limit <sup>2</sup>	Holding Time	Contain	ner Size <sup>3</sup>		
(1)				il Laboratory Samples						
Required Data		Calcium Carbonate % (as CaCO3)	USDA 60-23	0.10%	0.10%	14 days after extraction				
	Pace Analytical	Loss on Ignition - Organic Matter (LOI)	SSSA Part 3	0.10% 0.10%	0.10% 0.10%	14 days after extraction NA	500 grams (approximately of	quart zip-lock baggie 1/2 full)		
		Total Carbon (Mining Method) Total Organic Carbon - LECO Furnace	ASA 929-2.2 Calculation	0.10%	0.10%	NA NA	İ			
(2)		Acid Base Accounting	EPA 600/2-78-054	0.1 tons/1000 tons	0.1 tons/1000 tons	14 days after extraction				
Additional Data - ABA and Nutrients		Total Nitrogen	353.2	0.1 ppm	0.1 ppm	28 days after extraction				
P	Pace Analytical	Total Phosphorous	EPA 6010	10 mg/kg	4.3 mg/kg	6 months	250 grams (approximately q	uart zip-lock baggie 1/4 full).		
		TKN, Nitrogen	EPA 351.2	1 mg/L	0.07 mg/L	28 days after extraction				
(3)		Ortho-phosphate	SM4500-N-C	0.1 mg/L	0.05 mg/L	48 hours after extraction	20000 grams Approx	3/4 of five gallon bucket.		
Additional Data - Particle Size	Pioneer's Material Testing Laboratory	Particle Size Distribution	ASTM D6913	NA	NA	None	20000 granis. Approx.	5/4 of five gation bucket.		
(4) Split Sample	Split sample for Life Cycle Geo, LLC	NA	NA	NA	NA	NA	Approximate	ely 100 grams.		
(5) Additional Data - Mineralogy	Mineralogy, Inc. (Tulsa, OK)	Mineralogy (X-ray Diffraction)	NA	NA	NA	NA	Approximat	ely 50 grams.		
		Total Elemental Analysis (Whole Rock Analysis) Total digestion using hydrofluoric acid.								
		Aluminum (Al)		10 ppm	0.5 ppm	<u> </u>				
		Antimony (Sb)		20 ppm	4 ppm					
		Arsenic (As) Cadmium (Cd)		3 ppm 0.5 ppm	0.5 ppm 0.06 ppm					
		Calcium (Ca)	]	50 ppm	2 ppm	j				
(6)	D 4 1 2 2	Copper (Cu)	ED 4 (010	1 ppm	0.2 ppm			1 100		
Additional Data - Total Elemental Analysis	Pace Analytical	Iron (Fe) Lead (Pb)	EPA 6010	10 ppm 15 ppm	0.4 ppm 0.2 ppm	6 months	Approximate	ely 100 grams.		
		Magnesium (Mg)	]	50 ppm	6 ppm	j l				
		Manganese (Mn)		1ppm	0.02 ppm					
		Molybdenum (Mo) Potassium (K)		5 ppm 50 ppm	0.3 ppm 10 ppm					
		Silicon (Si)	]	15 ppm	7.45 ppm	j				
		Sodium (Na)		50 ppm	3 ppm	]				
		Sulfur (S) Zinc (Zn)		500 ppm 2 ppm	275.5 ppm 0.9 ppm					
		Toxicity Characteristics Leaching Procedure (TCLP)								
		Arsenic		200 μg/L	9.08 μg/L	180 Days				
		Barium Cadmium	6010D TCLP	100 μg/L 30 μg/L	6.73 μg/L 1.90 μg/L					
		Chromium		100 μg/L	4.27 μg/L					
		Copper		100 μg/L	14.3 µg/L					
		Lead Nickel		100 μg/L 200 μg/L	9.99 μg/L 9.20 μg/L					
		Selenium		200 μg/L	6.86 μg/L					
		Silver		100 μg/L	4.13 μg/L					
		Zinc Mercury	7470A TCLP	200 μg/L 0.6 μg/L	11.3 μg/L 0.286 μg/L					
		Chlordane	, , , , , , , , , , , , , , , , , , , ,	5 μg/L	2.11 μg/L					
		Endrin		1 μg/L 0.5 μg/L	0.207 μg/L 0.0946 μg/L	-				
		Heptachlor (and its epoxide) Lindane	8081B TCLP	0.5 μg/L 0.5 μg/L	0.0946 μg/L 0.0665 μg/L	- 14 Days				
		Methoxychlor		5 μg/L	1.72 μg/L					
		Toxaphene Benzene		15 μg/L 25 μg/L	3.90 μg/L 2.58 μg/L					
		Carbon tetrachloride	•	25 μg/L 25 μg/L	3.34 µg/L	-				
(7)	Pace Analytical	Chlorobenzene		25 μg/L	3.33 μg/L		2 1-L G	ilass Jars		
Additional Data - DE Fill	race Analytical	Chloroform 1,4-Dichlorobenzene		25 μg/L 25 μg/L	5.8 μg/L 3.66 μg/L	-				
		1,2-Dichloroethane	8260D TCLP	25 μg/L 25 μg/L	4.24 μg/L	14 Days				
		1,1-Dichloroethylene		25 μg/L	3.31 μg/L					
		Methyl ethyl ketone Tetrachloroethylene		250 μg/L 25 μg/L	27.4 μg/L 2.62 μg/L					
		Trichloroethylene		25 μg/L	3.05 μg/L	<u> </u>				
		Vinyl chloride		25 μg/L	1.15 μg/L					
		o-Cresol m-Cresol		100 μg/L 100 μg/L	8.88 μg/L 9.74 μg/L					
		p-Cresol	]	100 μg/L	9.74 μg/L	]				
		2,4-Dinitrotoluene		100 μg/L	9.15 μg/L					
		Hexachloro-1,3-butadiene	00505 505 5	100 μg/L 100 μg/L	12.8 μg/L 8.51 μg/L	-				
		Hexachloroethane	8270E TCLP	100 μg/L	7.19 μg/L	- 14 Days				
		Nitrobenzene Pentaghlaranhanal		100 μg/L 200 μg/L	6.15 μg/L					
		Pentachlorophenol Pyridine		200 μg/L 500 μg/L	20.0 μg/L 9.23 μg/L					
		2,4,5-Trichlorophenol		100 μg/L	11.3 μg/L	]				
		2,4,6-Trichlorophenol 2,4-D		100 μg/L 5 μg/L	6.86 μg/L 5 μg/L					
		2,4-5 2,4,5-TP (Silvex)	8151A TCLP	5 μg/L	5 μg/L 5 μg/L	- 14 Days				
I Additional Data - Material Characterization		Moisture Content	ASTM D2216	NA	NA	NA		Composite Subsample: 1,000 grams or approximately quart zip-lock bag.		
	Pioneer's Material Testing Laboratory	Gradation	ASTM C117 ASTM C136	NA	NA	NA		Composite Subsample: 60,000 grams or approximately (2) 5-gallon buckets.		
		Abrasion	ASTM C131	NA	NA	NA	Bulk Composite Sample:	Composite Subsample:		
		Specific Gravity	ASTM C127 ASTM C128	NA	NA	NA	10 cubic yards	Approximately (4) 5-gallon buckets.		
	WSP Material Testing Laboratory	Column Settling	NA	NA NA		NA		Composite Subsample: Approximately (2) 5-gallo		
		Slurry Consolidation	NA	NA	NA	NA		buckets.		

Atlantic Richfield may choose to use a different laboratory based on project needs. Regardless of the laboratory chosen, Atlantic Richfield will ensure the necessary reporting limits, required methodology, and the specified quality assurance/quality control and data validation requirements are followed as detailed in the SBCCA Repository Data Gap QAPP. Agencies will be informed of any changes in the reporting limits, methodology, or the quality assurance/quality control and data validation procedures.

2 Pace Analytical will report results to the method detection limit. The analytical lab's reporting limits are subject to change as these values are updated periodically to reflect analytical sensitivity and capability. Atlantic Richfield will ensure that any updates to the reporting limits or detection limits do not affect the ability for the Data Quality Objectives to be met and the updates will be specified in the Data Summary Report.

mg/L - milligram per liter mg/kg - milligram per kilogram ppm = parts per million

<sup>&</sup>lt;sup>3</sup>There are no preservation requirements for these analyses. Per the selected laboratories, the samples for Groups 1, 2, 3, 4, 5, and 6 are not required to be maintained at a certain temperature. Group 7 for TCLP analysis to be collected in an unpreserved container and cooled to <6°C.

**Table 6. BPSOU Site Investigation Locations** 

Location Northing (Approximate	Northing (Approximate)		Proposed Excavation Depth (ft)	Total Depth (ft)	Installation Method	Archived Core Sampling (Analytical Groups from Table 5)		New Boreholes/Test Pits (Analytical Groups from Table 5		
	(тррголінасе)	(пррголишее)	Depth (it)			Discrete Sample	Composite Sample	Discrete Sample	Composite Sample	Fill Sample
falo Gulch Boreholes										
BG24-BH01	651539.78	1196809.92	6.7	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
BG24-BH02	651702.68	1197132.50	10.5	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
BG24-BH03	651444.39	1197256.65	7.4	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
BG24-BH04	651453.39	1197364.52	7.7	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
BG24-BH05	651428.28	1197683.70	9.4	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
BG24-BH06	651404.46	1197844.92	11.2	20	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	=
BG24-BH07	651411.19	1197995.42	12.2	20	Geoprobe	_	-	1, 4	1, 2, 3, 5, 6	-
BG24-BH08	651377.94	1198182.89	10.3	15	Geoprobe	_	-	1, 4	1, 2, 3, 5, 6	_
BG24-BH09	651397.98	1198377.62	10.8	15	Geoprobe	<del>-</del>	_	1, 4	1, 2, 3, 5, 6	_
BG24-TP01	651436.27	1197440.00	9.1	10	Excavator	_	_	-		_
BG24-TP02	651373.54	1198236.00	12.0	12	Excavator	_	_	-	8	
	eholes and Piezometers		12.0	12	LACUVATOI					
BRW18-BH27	651313.45	1195016.77	9.9	15	Geoprobe		1, 2	<u>-</u>		
BRW18-PZ02			9.9		•		· · · · · · · · · · · · · · · · · · ·		+	<del>-</del>
	651239.59	1195014.45		40	Geoprobe	1, 4	1, 2	-	-	-
BRW18-PZ05	651430.31	1195183.84	10.3	28	Geoprobe	1, 4	1, 2	-	-	-
BRW19-HCW38	651319.59	1195542.24	20	24.5	Sonic	1, 4	1, 2	-	-	-
BRW19-PZ27	651271.93	1194908.24	9.3	29	Geoprobe	1, 4	1, 2	-	-	-
BRW19-PZ32R	651238.96	1194999.89	12.5	25	Geoprobe	1, 4	1, 2	-	-	-
BRW21-BH43	651434.42	1196505.17	NA - Outside Excavation Boundary	30	Geoprobe	-	1, 2	-	-	-
BRW24-BH01	651166.14	1194947.88	11.1	20	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
BRW24-BH02	651301.03	1195120.82	12.3	20	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
BRW24-BH03	651310.15	1195297.79	21.7	25	Sonic	_	-	1, 4	1, 2, 3, 5, 6	_
BRW24-BH04	651389.63	1195441.91	16.0	25	Sonic	<u>-</u>	_	1, 4	1, 2, 3, 5, 6	_
BRW24-BH05	651212.23	1195686.04	10.0	15	Sonic	<del>-</del>	_	1, 4	1, 2, 3, 5, 6	
BRW24-BH06	651288.07	1195923.41	13.2	20	Sonic		_	1, 4	1, 2, 3, 5, 6	_
BRW24-BH07	651367.23	1196235.05	11.8	20	Sonic		_	1, 4	1, 2, 3, 5, 6	_
BRW24-BH08	651425.21	1196453.18	13.3	20	Sonic	<u> </u>	_	1, 4	1, 2, 3, 5, 6	
BRW24-TP01	651493.80	1195316.00	28.6	29	Excavator	-	-	- -	1, 2, 3, 3, 0	-
BRW24-TP02	651237.60	1195349.00	21.8	22	Excavator				-	
BRW24-TP03	651189.10	1195475.00	16.2	17		-	-	<u>-</u>	-  <sub>Q</sub>  -	-
BRW24-TP04	651274.60	1195475.00	15.3	16	Excavator Excavator	-	-	-	-	
BRW24-TP05	651368.90	1196110.00		14		-	-	-	-	-
			14.0	14	Excavator	-	-	-		-
	cometers, and Boreholes		17.0	20	C 1	1 4			1	
DE-PZ-14A	651150.44	1199347.17	17.9	30	Geoprobe	1, 4	-	-	-	-
DE-TP-08	651601.91	1200297.47	8.5	15	Geoprobe	-	1, 2	-	-	-
DE-TP-12	651201.91	1199497.47	17.1	15	Geoprobe	-	1, 2	-	-	-
DE24-BH01	651118.02	1198906.29	7.6	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	
DE24-BH02	651178.29	1199188.49	8.4	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
DE24-BH03	651249.08	1199432.43	8.6	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
DE24-BH04	651283.26	1199696.25	6.9	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
DE24-BH05	651450.33	1199985.47	6.1	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
DE24-BH06	651434.66	1200161.38	4.1	10	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	
DE24-BH07	651442.31	1200339.31	14.3	20	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
DE24-BH08	651598.07	1200341.00	9.8	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
DE24-BH09	651640.34	1200500.02	8.4	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
DE24-BH10	651663.14	1200615.43	4.8	10	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
DE24-BH11	651898.62	1200633.00	10.1	15	Geoprobe	<del>-</del>	_	1, 4	1, 2, 3, 5, 6	_

SBCCA Repository Data Gap QAPP
Page 1 of 3

**Table 6. BPSOU Site Investigation Locations** 

Location Northing (Approximate)	Ş	Proposed Excavation Depth (ft)	Total Depth (ft)	Installation Method	Archived Core Sampling (Analytical Groups from Table 5)		New Boreholes/Test Pits (Analytical Groups from Table 5)			
	(Аррголіпасс)	(Approximate)	Depth (it)			Discrete Sample	Composite Sample	Discrete Sample	Composite Sample	Fill Sample
DE24-BH12	650909.46	1199008.93	7.3	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
DE24-BH13	650854.80	1199241.17	8.7	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
DE24-BH14	650908.51	1199371.65	7.4	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
DE24-BH15	650944.07	1199534.08	7.1	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
DE24-BH16	650954.25	1199660.42	5.1	10	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
DE24-BH17	651001.96	1199865.83	4.9	10	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	=
DE24-BH18	650980.43	1199952.66	5.5	10	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	=
DE24-BH19	651006.25	1200049.48	8.1	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
DE24-BH20	651013.56	1200219.33	6.7	15	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
DE24-BH21	651024.88	1200345.39	6.5	15	Geoprobe	-	_	1, 4	1, 2, 3, 5, 6	-
DE24-BH22	651072.87	1200507.62	7.7	15	Geoprobe	-	_	1, 4	1, 2, 3, 5, 6	-
DE24-TP01	651118.02	1198906.29			Excavator	-	-	-	-	7
DE24-TP02	651178.29	1199188.49	1		Excavator	=	-	-	-	7
DE24-TP03	651249.08	1199432.43			Excavator	=	-	-	-	7
DE24-TP04	651283.26	1199696.25	1		Excavator	=	-	-	-	7
DE24-TP05	651450.33	1199985.47	1		Excavator	-	-	-	-	7
DE24-TP06	651434.66	1200161.38	1		Excavator	=	-	-	-	7
DE24-TP07	651442.31	1200339.31	1		Excavator	=	-	-	-	7
DE24-TP08	651598.07	1200341.00	1		Excavator	=	-	-	-	7
DE24-TP09	651640.34	1200500.02	1		Excavator	=	-	-	-	7
DE24-TP10	651663.14	1200615.43	The	h - d - 4 - 4 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1	Excavator	-	-	-	-	7
DE24-TP11	651898.62	1200633.00	The excavation depth will b	1 0	Excavator	=	-	-	-	7
DE24-TP12	650909.46	1199008.93	on field conditions encou availa		Excavator	-	-	-	-	7
DE24-TP13	650854.80	1199241.17	- avana	ible.	Excavator	=	-	-	-	7
DE24-TP14	650908.51	1199371.65	1		Excavator	_	-	-	-	7
DE24-TP15	650944.07	1199534.08	1		Excavator	-	-	-	-	7
DE24-TP16	650954.25	1199660.42	1		Excavator	-	-	-	-	7
DE24-TP17	651001.96	1199865.83	1		Excavator	=	-	-	-	7
DE24-TP18	650980.43	1199952.66	]		Excavator	-	-	-	-	7
DE24-TP19	651006.25	1200049.48			Excavator	-	_	-	-	7
DE24-TP20	651013.56	1200219.33	1		Excavator	=	-	-	-	7
DE24-TP21	651024.88	1200345.39			Excavator	-	-	-	-	7
DE24-TP22	651072.87	1200507.62			Excavator	-	-	-	-	7
DE24-TP23	651492.18	1200276.00	6.5	7	Excavator	-	-	-		-
DE24-TP24	651162.40	1199112.00	6.6	7	Excavator	-	-	-	0	-
DE24-TP25	650938.62	1199463.00	5.9	6	Excavator	-	-	-	8	-
DE24-TP26	651076.03	1199940.00	12.4	13	Excavator	-	_	_		_

SBCCA Repository Data Gap QAPP
Page 2 of 3

**Table 6. BPSOU Site Investigation Locations** 

Location	Northing (Approximate)	Easting (Approximate)	Proposed Excavation Depth (ft)	Total Depth (ft)	Installation Method	Archived Core Sampling (Analytical Groups from Table 5)		New Boreholes/Test Pits (Analytical Groups from Table 5)		
	(Approximate)					Discrete Sample	Composite Sample	Discrete Sample	Composite Sample	Fill Sample
Northside Tailings Pumping V	Wells, Test Pits, and B	oreholes								
NST-TP-24 (NST-PZ-09)	651466.48	1199117.88	7.4	15	Geoprobe	-	1, 2	-	-	-
NST24-BH01	651480.50	1198701.88	14.6	20	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
NST24-BH02	651521.29	1198973.62	6.0	10	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
NST24-BH03	651779.31	1199905.75	3.9	10	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
NST24-BH04	651961.12	1200029.67	13.4	20	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
NST24-BH05	652128.62	1200192.87	2.9	10	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
NST24-BH06	652274.57	1200330.18	5.9	10	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
NST24-BH07	652386.72	1200481.88	3.6	10	Geoprobe	-	-	1, 4	1, 2, 3, 5, 6	-
NST24-TP01	651500.03	1198776.00	4.2	5	Excavator	-	-	-	Q	-
NST24-TP02	652263.61	1200441.82	4.0	4	Excavator	-	-	-	O	-
Quality Assurance Samples										
Field Duplicate	Verify sampling procedures, 1 per 20 samples. No field duplicate needed for Particle Size Distribution and XRD analysis.		-		-	-	-	-	-	-

SBCCA Repository Data Gap QAPP
Page 3 of 3